


Plastic Jerrycan

Specification:

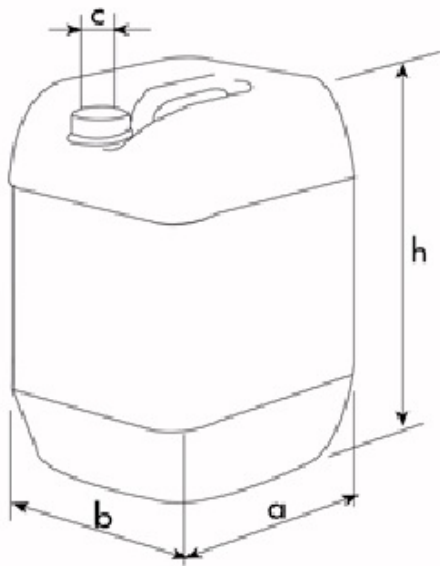

| | |
|------------------------|---|
| Last Revision | 01/06/2019 |
| Printing Date | 22/09/2020 |
| Customer Name | |
| Customer Item Code | |
| Item Code | DRPL00442IT10002 |
| Item Code Description | J4 011 00450 BL BL BL HDPE 0 P |
| Commercial Description | TANICA L11 UN 0450 BL D51 SOTT C4-11 BLU 01 - L11 UN 450 SOTTOT BLU |

| | |
|-----------------------|---------------------------|
| Type | JERRY CAN C04 |
| Material | HIGH DENSITY POLYETHYLENE |
| Manufacturing Process | Extrusion Blow-moulding |

| | |
|-------------------|---------|
| Weight | 450 g |
| Nominal Capacity | 11 l |
| Brimful Capacity | 11,2 l |
| Length #a | 23 cm |
| Width #b | 19,5 cm |
| Height | 32,5 cm |
| Internal Diameter | 45 mm. |
| External Diameter | DIN 51 |
| Body Color | BLUE |

| | |
|---------|--|
| Opening | |
|---------|--|

| | |
|--|--|
| Closing Torque | 22 ± 2 N.m. |
| For Food | Ask your supplier for the specific declaration |
| Amount per Pallet | 200 (8 PACCHI) |
| Stacking height up to 25 °C with density | 1.4 kg/l 1.8 kg/l 1+ 2 1+ 1 |
| Pallet Type | WOODEN GREIF 1200x1000x125 |
| Decoration | NO DECORATION |
| Decoration Detail | |
| UN Approval | 3H1/ Y 1,9/150 |

| | |
|------|---|
| Note | Tolerances: DIN 16901 These figures only apply when drums are filled to 98% of their capacity and stacked on reverseable flat pallets. The bottom surface must cover at least 80% of the top area. |
|------|---|

| Umfang der Zulassung / Summary of Packaging Performance | | | | | |
|---|---|------|---|------|-----|
| Standardflüssigkeit (standard liquid) | Max. Füllgütdichte (Max. density of goods) (g/cm ³) | | Dampfdruck (absolut) vapour pressure (absolute) (kPa) | | |
| | I | II | 50°C | 55°C | |
| Wasser water | - | 1,90 | 1,90 | 143 | 167 |
| Netzmittellösung Wetting solution | - | 1,20 | 1,20 | 143 | 167 |
| Essigsäure 98-100 % Acetic Acid 98-100 % | - | 1,20 | 1,20 | 143 | 167 |
| n-Butylacetat/ mit n-Butylacetat gesättigte Netzmittellösung n-butylacetate / n-butylacetate saturated wetting solution | - | 1,20 | 1,20 | 143 | 167 |
| Kohlenwasserstoffgemisch Mixture of hydrocarbons (white spirit) | - | 1,20 | 1,20 | 143 | 167 |
| Salpetersäure max. 55% nitric acid max 55 | - | 1,40 | 1,40 | 143 | 167 |

All images are inserted for illustrative purposes

| | |
|----------|--|
| Contact: | Greif Italy Srl |
| Address: | Viale Industria, 29 - Bottanuco (BG) Italy |

Thank you for your choice

For Approval

Date: Signature:



DISCLAIMER:
This specification does not relieve the customer of their ultimate responsibility for the determination of the appropriate container. It is the customer's responsibility to select the appropriate packaging based upon all information at their disposal including the specific application, regulatory compliance, product compatibility and shipping requirements. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. GREIF is not liable for improper use of its products and is entitled to arrange technical changes without prior advice. If not returned signed within thirty days, GREIF will consider this document as approved.
www.greif.com

For proper use read our instruction manual